


Product Specifications

Part Number: **CGS-4232-NB1-PC-A120**

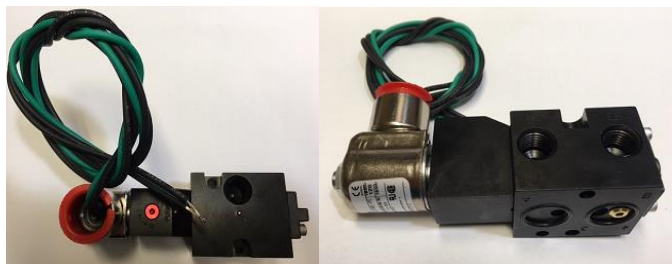

Description:

Title: VALVE, FOUR-WAY

Actuator(s): Solenoid, Spring Return

Function: 4-way, 2-position

Body: NAMUR Mount


Media: Air - Inert Gas 15-115 psi 1.0-8.0 bar
Flow: 0.750 Cv

Maintenance & Documentation

Repair kit:	C-4222-SP
Replacement coil/operator:	P-1005-90-PC-A120
Drawing:	GC5-0209
Operation & Installation:	
Catalog:	NAMUR

Materials of Construction

Body: Aluminum
Seals: FKM
Weight: 0.9 lb
 0.4 kg

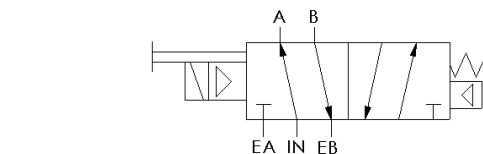

Solenoid Specifications



Description:	General Purpose - C5 Class
Operating voltage:	120V 60 Hz ±10%
Power (nominal):	6 w
Inrush:	127 mA
Holding:	75 mA
Resistance:	496 ohms
Ingress Protection:	NEMA 4X
Coil class:	F
Duty cycle:	Continuous Duty
Protection:	General purpose
Certification:	CSA / UL



Operator Construction

Solenoid housing material:	Steel - Plated
Solenoid seal material:	Buna
Coil:	Epoxy Molded
Solenoid Connection:	1/2" NPT female conduit with 24" wires